

# MTA 6034 SERIES III

CONSTRUCTION telescopic handler



## KEY FEATURES

- > 6,000 lbs. (2722kg) maximum lift capacity
- > 34'3" (1.4m) maximum lift height
- > 4,000 lbs. (1815kg) lift capacity to 34'3" (10.4m)
- > 74 hp (55kW) Deutz diesel engine
- > F·N·R single joystick control
- > Transportable at 15,000 lbs.
- > Frame leveling 10° left / 10° right
- > Ideal rental product for jobsites up to three stories
- > Boom tip lift shackle



# MTA 6034 SERIES III


## CONSTRUCTION telescopic handler

### SPECIFICATIONS

CAPACITIES	Lift Capacity (kg)	6,000 lbs. (2722)
	Maximum Lift Height (m)	34'3" (10.4)
	Capacity at Maximum Lift Height (kg)	4,000 lbs. (1815)
	Maximum Forward Reach (m)	23'3" (7)
	Capacity at Max. Forward Reach (kg)	900 lbs. (409)
	Max. Reach Below Grade (mm)	24" (610)
ENGINE	Manufacturer	Deutz
	Power (kW)	74 hp (55)
	Aspiration	Turbocharged
	Model	TD 3.6 L4
	Rated Speed	2500 rpm
COMPONENTS	Transmission	Dana 3-speed Powershift
	Maximum Travel Speed (km/hr)	18 mph (29)
	Selective Steering	4-wheel   2-wheel   Crab
	Hydraulically Actuated Brakes	Internal Wet-Disc Brakes
	Parking Brake	SAHR on Front Axle
	Axle Manufacturer	Dana
HYDRAULIC SYSTEM	Pump Type	Gear
	Pump Flow (L/min)	29 gpm (110)
	System Pressure (bar)	3,000 psi (207)
	Hydraulic Tank Capacity (L)	29 gal (110)
GENERAL SPECIFICATIONS	Approximate Weight (kg)	15,100 lbs. (6850)
	Length – Less Forks (m)	16'0" (4.9)
	Width (m)	7'10" (2.4)
	Ground Clearance (mm)	14" (350)
	Wheelbase (m)	9'2" (2.8)
	Turning Radius (m)	12'6" (3.8)
	Overall Height (m)	7'10" (2.4)
	Frame Leveling	±10
	Fuel Capacity (L)	29 gal. (110)
TIRE OPTIONS	15.00 X 19.5 Pneumatic	
	15.00 x 19.5 Foam Filled	
	15.00 x 19.5 Solid Rubber	

### LOAD CHART

Load chart based on a 24" (610 mm) load center per ANSI/ITSDF B56.6

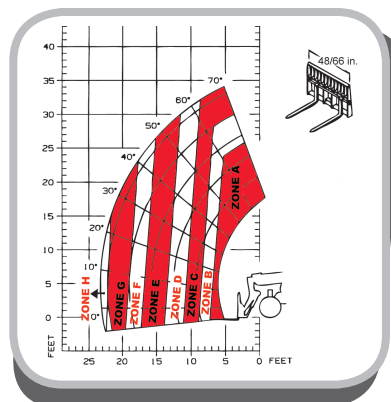

- A** 6,000 lbs. (2722 kg)
- B** 5,000 lbs. (2268 kg)
- C** 4,000 lbs. (1814 kg)
- D** 3,000 lbs. (1361 kg)
- E** 2,000 lbs. (907 kg)
- F** 1,500 lbs. (680 kg)
- G** 1,000 lbs. (454 kg)
- H** 900 lbs. (408 kg)